

Plugin Versions

Use this [Wiki Plugin](#) to divide a [wiki](#) page into separate "versions." Tiki will display a navigation box that allows users to display each version of the page. For example, you can use this plugin to separate a single wiki page into Release 1, Release 2, and Release 3 information.

Parameters

Create tabs for showing alternate versions of content

Introduced in Tiki 1.

[Go to the source code](#)

Preferences required: `wikiplugin_versions`

Parameters	Accepted Values	Description	Default	Since
(body of plugin)		Block of text separated by <code>-(version x)-</code> markers. Text before the first marker is used by default.		
<code>default</code>		Specifies version label to show when displaying the page for the first time. Default label is 'Default'	Default	1
<code>nav</code>	(blank) y n	Display a navigation box that allows users to select a specific version to display.	n	1
<code>title</code>	(blank) y n	Display the current version name as the title. No title shows when <code>nav="y"</code> ; otherwise shows by default.	y	1

Notes

- If you use [Wiki Config](#) wiki page caching, this plugin may not render properly.
- The "versions" used for this plugin are different than the "versions" stored in the [wiki page history](#).

Examples

To separate different versions of text use: 3 dashes (hyphens), followed by the version label in parenthesis, followed by at least 3 other dashes or hyphens. For example:

```
---(version 3)-----
```

Basic example

This code:

```
{VERSIONS(nav="y" title="y")}
```

This is the default text

```
---(version 3)-----
```

This is version 3 info

```
---(version 2)-----
```

This is version 2 info

```
---(version 1)-----
```

This is version 1 info

{VERSIONS}

Would produce:

This is the default text

More Examples

This code:


```
{VERSIONS(nav="n")} This is the default text ---(version 3)----- This is version  
3 info ---(version 2)----- This is version 2 info ---(version 1)-----  
This is version 1 info {VERSIONS}
```

Would produce:

Default

This is the default text

Sample usage in conjunction with [PluginTracker](#) and [PluginTrackerList](#) (these are Screenshots):

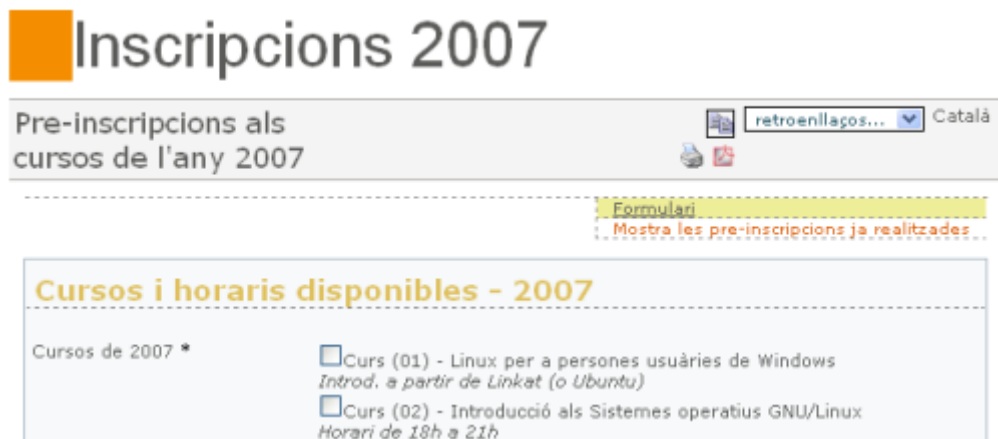

The screenshot shows a web page with the following elements:

- Header: "Inscripcions 2007" with an orange square logo.
- Sub-header: "Pre-inscripcions als cursos de l'any 2007".
- Language selector: "retroenllaços..." and "Català".
- Buttons: "Formulari" and "Mostra les pre-inscripcions ja realitzades".
- Section: "Cursos i horaris disponibles - 2007".
- Content: "Cursos de 2007 *"
 - Curs (01) - Linux per a persones usuàries de Windows
Introd. a partir de Linkat (o Ubuntu)
 - Curs (02) - Introducció als Sistemes operatius GNU/Linux
Horari de 18h a 21h

Default text: Formulari, using PluginTracker

Inscripcions 2007

Pre-inscripcions als
cursos de l'any 2007



retroenllaços...

Català



Formulari

Mostra les pre-inscripcions ja realitzades

Linux per a persones usuàries de Windows. Introducció a partir de Linkat (o Ubuntu)

Horari: Si no et va bé l'actual, quin t'aniria millor?	Nom	Cognome	Prioritat segons "fractura digital" FTIC	creat
	Luis Jaime	Ortiz Vasquez	3	Dm 09 de Jan, 2007 [12:57]
	MERCE	BONDIA BOVE	3	Dv 12 de Jan, 2007 [19:22]

Alternate version: Mostra les pre-inscripcions ja realitzades, , using PluginTrackerList

Alias

- [PluginVersion](#)